




SPECIAL FEATURES:

- Spring loaded design for positive contact with thermowell
- Available in all sheath diameters
- Mineral insulation enables flexibility and Durability.
- Enclosures in all material - Die cast Aluminium / SS 304 / SS 316
- Enclosures in all categories (Weatherproof, IP-65 to IP-68, Flameproof Gr. IIA IIB and Explosionproof, Gr. IIA, IIB, IIC for H₂ service application.)

Reference standard :- IEC - 751 / DIN 43760

Terminal Head

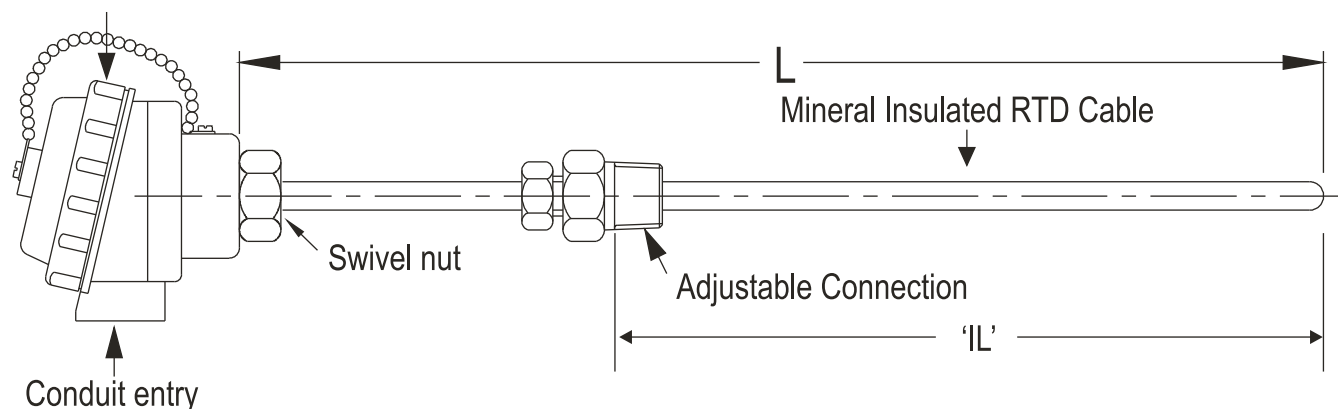

HOW TO ORDER

Code	No of Element
1	Simplex
2	Duplex

1

Code	Element Type
Pt - 100	Pt - 100 RTD
Pt - 500	Pt - 500 RTD
Pt - 1000	Pt - 1000 RTD
Cu - 53	Cu - 53

2

Code	Range
FLM	-200°C till 449°C
CMC	450°C till 600°C

3

Code	Accuracy
A	Class 'A' Tolerance as per IEC - 751
B	Class 'B' Tolerance as per IEC - 751

4

Code	Wire Configuration
2W	2 Wire System
3W	3 Wire System
4W	4 Wire System

5

APPLICATIONS:

- Such design is generally used in all industries, machinery manufactures, bearing temp measurement etc.

STANDARD PRODUCT DETAILS

- | | |
|-----------------------|--|
| No of element | - Simplex |
| Element type | - Pt - 100 RTD |
| Range | - -200°C till 449°C |
| Accuracy | - Class 'B' Tolerance as per IEC - 751 |
| Wire Configuration | - 3 Wire System |
| Sheath Diameter | - 6.0 mm |
| Sheath Material | - SS 304 / SS 316 |
| Terminal Head Type | - Screwed type, weatherproof, IP-65 / 67 in die cast Aluminium |
| No. Of Conduit Entry | - One |
| Conduit Entry Size | - ½" NPT (F) |
| Head Extension Type | - Adjustable Threaded Connection |
| Immersion Length 'IL' | - Adjustable |
| Element Length 'L' | - L = 300 mm. |
| Process conn. "P" | - ½"NPT(M) |
| Option Description | - S.C. cable gland in nickel plated brass |

Notes : • Drawings are not to scale. • All Dimensions are in mm.

Code	Sheath Diameter
3	3.0 mm
4	4.0 mm
5	5.0 mm
6	6.0 mm
8	8.0 mm
10	10.0 mm
Consult factory for other diameter.	

6

Code	Sheath Material
304	SS 304 (Standard)
316	SS 316

7

Code	Terminal Head Type
SW5	Screwed type, weatherproof, IP-65 in die-cast Aluminium
SW7	Screwed type, weatherproof, IP-67 in die-cast Aluminium
SFP	Screwed type, flameproof Gr. IIA IIB in die-cast Aluminium
SEP	Screwed type, explosionproof Gr.IIC in die-cast Aluminium
HWP	Hinged type, weatherproof, IP-65 in die-cast Aluminium
BWP	Weatherproof Head, IP-65 in die-cast Aluminium with cover fitted with two screws.

8

Code	No. Of Conduit Entry/Entries
1	One
2	Two
	Other, Please Specify

9

Code	Conduit Entry Size
A	3/4" ET(F)
B	1/2"NPT(F)
C	3/4"NPT(F)
	Other, Please Specify

10

Code	Head Extension Type
AC	Adjustable Threaded Connection

11

Code	Immersion Length 'L' / Element Length 'L' mm
	Specify in mm.

12

Code	Process conn. "P"
A	1/2"NPT(M)
B	1/2" BSP(M)
C	3/4"NPT(M)
D	3/4" BSP(M)
	Other, Please Specify

13

Code	Option Description
0	None
3	Terminal head in SS 304
4	Terminal head in SS 316
6	S.C. cable gland in nickel plated brass
7	D.C. cable gland in nickel plated brass
8	S.C. cable gland in SS 304
9	D.C. cable gland in SS 304
11	S.C. cable gland in SS 316
12	D.C. cable gland in SS 316
13	Head mounted temp. transmitter
14	S.S. base plate suitable for Temperature Transmitter mounting
16	Head Extension in SS 304.
17	Head Extension in SS 316.
20	Plug for conduit entry in Carbon Steel [ASTM A105]
21	Plug for conduit entry in SS 304
22	Plug for conduit entry in SS 316
23	Plug for conduit entry in Aluminium
PW	Factory Calibration Certificate
SX	SS Tag Plate
TC	Teflon Coating on Sheath

14

Note :

1. When selecting option "PW", please also specify measuring temperature range.(For e.g. 0/300°C)

2. Explanations of Abbreviations used:

- SC = Single Compression
- DC = Double Compression
- SS = Stainless Steel

(Ordering Example)

RTD 02	1	(Pt-100)	FLM	B	3W	6	316	SWP	1	B	AC	L = 300	A	6
	1	2	3	4	5	6	7	8	9	10	11	12	13	14